


IMPORTANT

DETENT PIN MUST NOT BE REMOVED

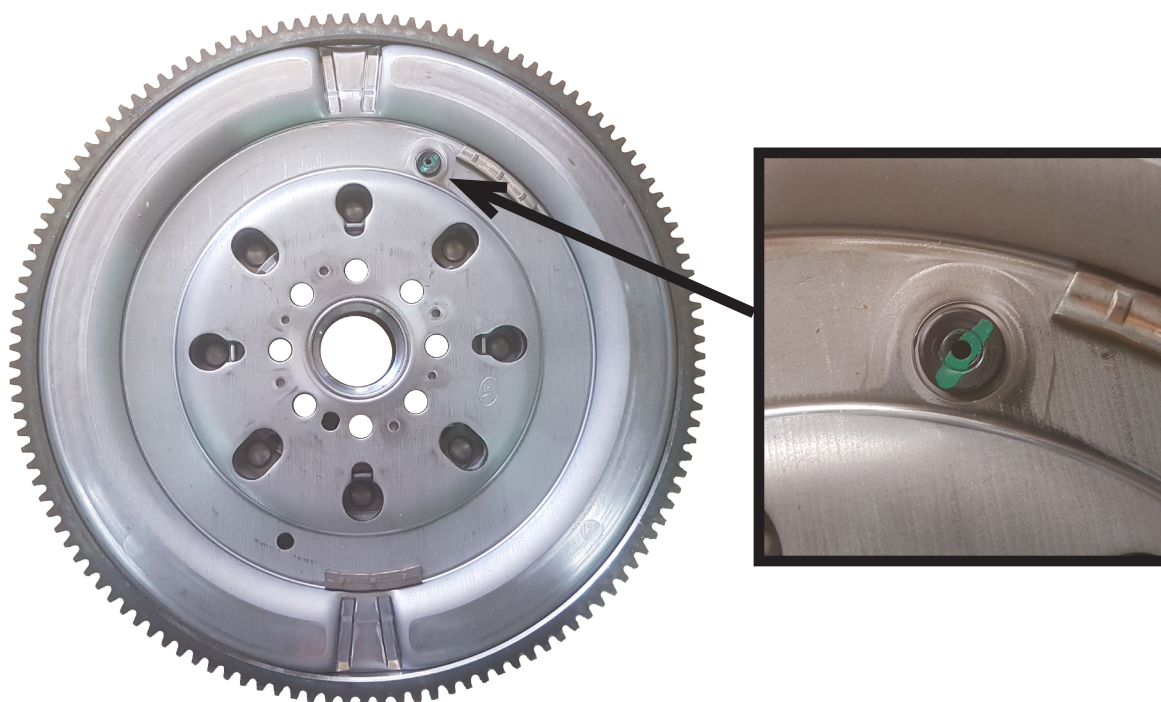

The Dual Mass Flywheel in this kit may be fitted with a transport fastener which contains a detent pin (see image above). This pin stops the two masses from moving against each other before the engine is started for the first time after installation.

DO NOT REMOVE THE FASTENER MANUALLY.

The first time the engine is started after installation of the new flywheel, the detent pin will be sheared off automatically at a pre-determined breaking point. The detached parts of the fastener will remain safely inside the flywheel.