


Disassembly And Installation Procedure – New Technology Design Clutch

Ref: TNX

Issue date: 14 Dec 2004

Issue number: 2

NEW TECHNOLOGY DESIGN CLUTCH

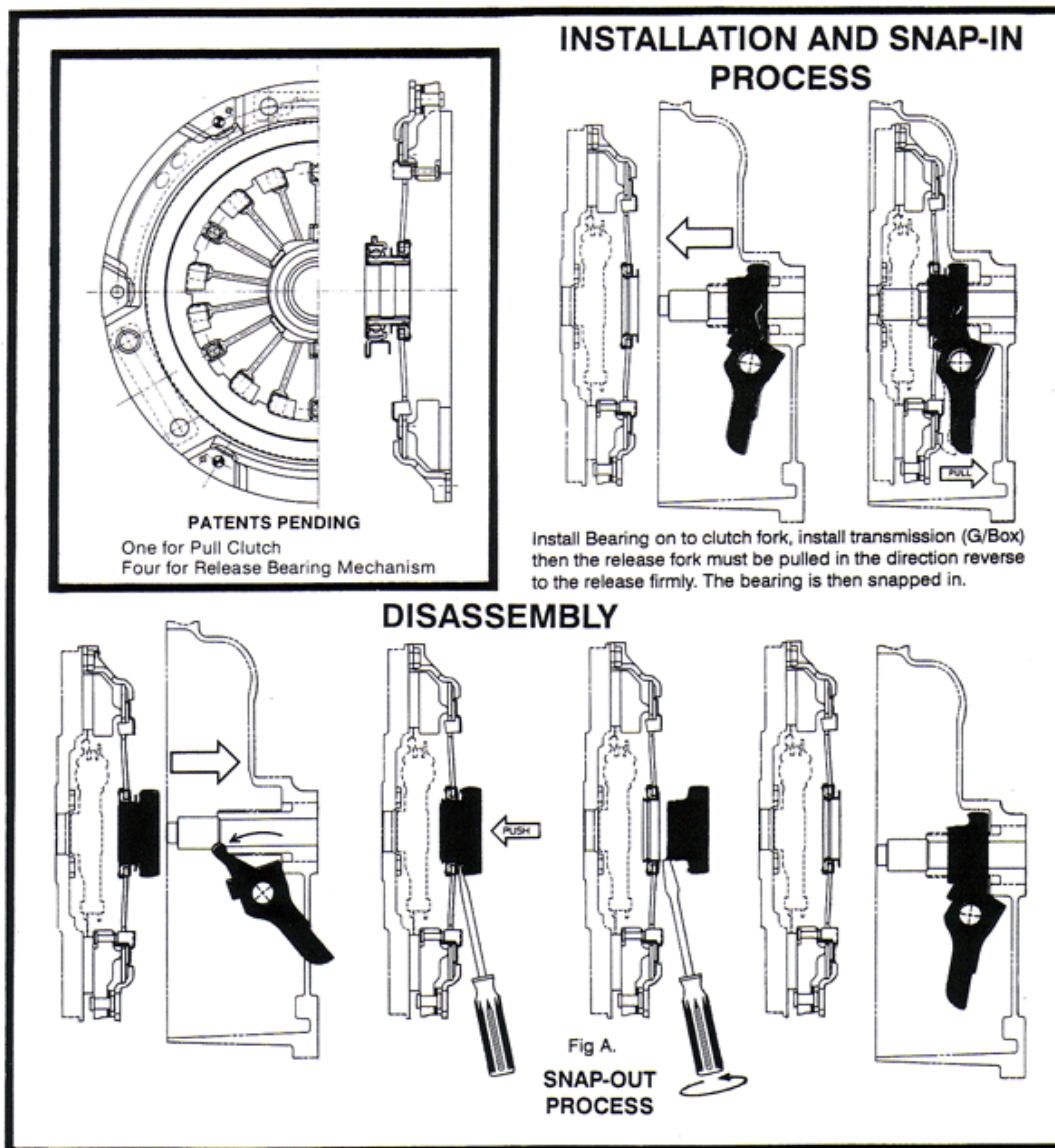

Procedure: move bell-housing back approximately 30 to 40mm, insert screwdriver and twist as Figure A. Bearing will then snap out from its retaining clip.

WARNING: do not use the above method for Subaru and Hyundai models with pull type design clutch. Refer Tech Notes O & W respectively